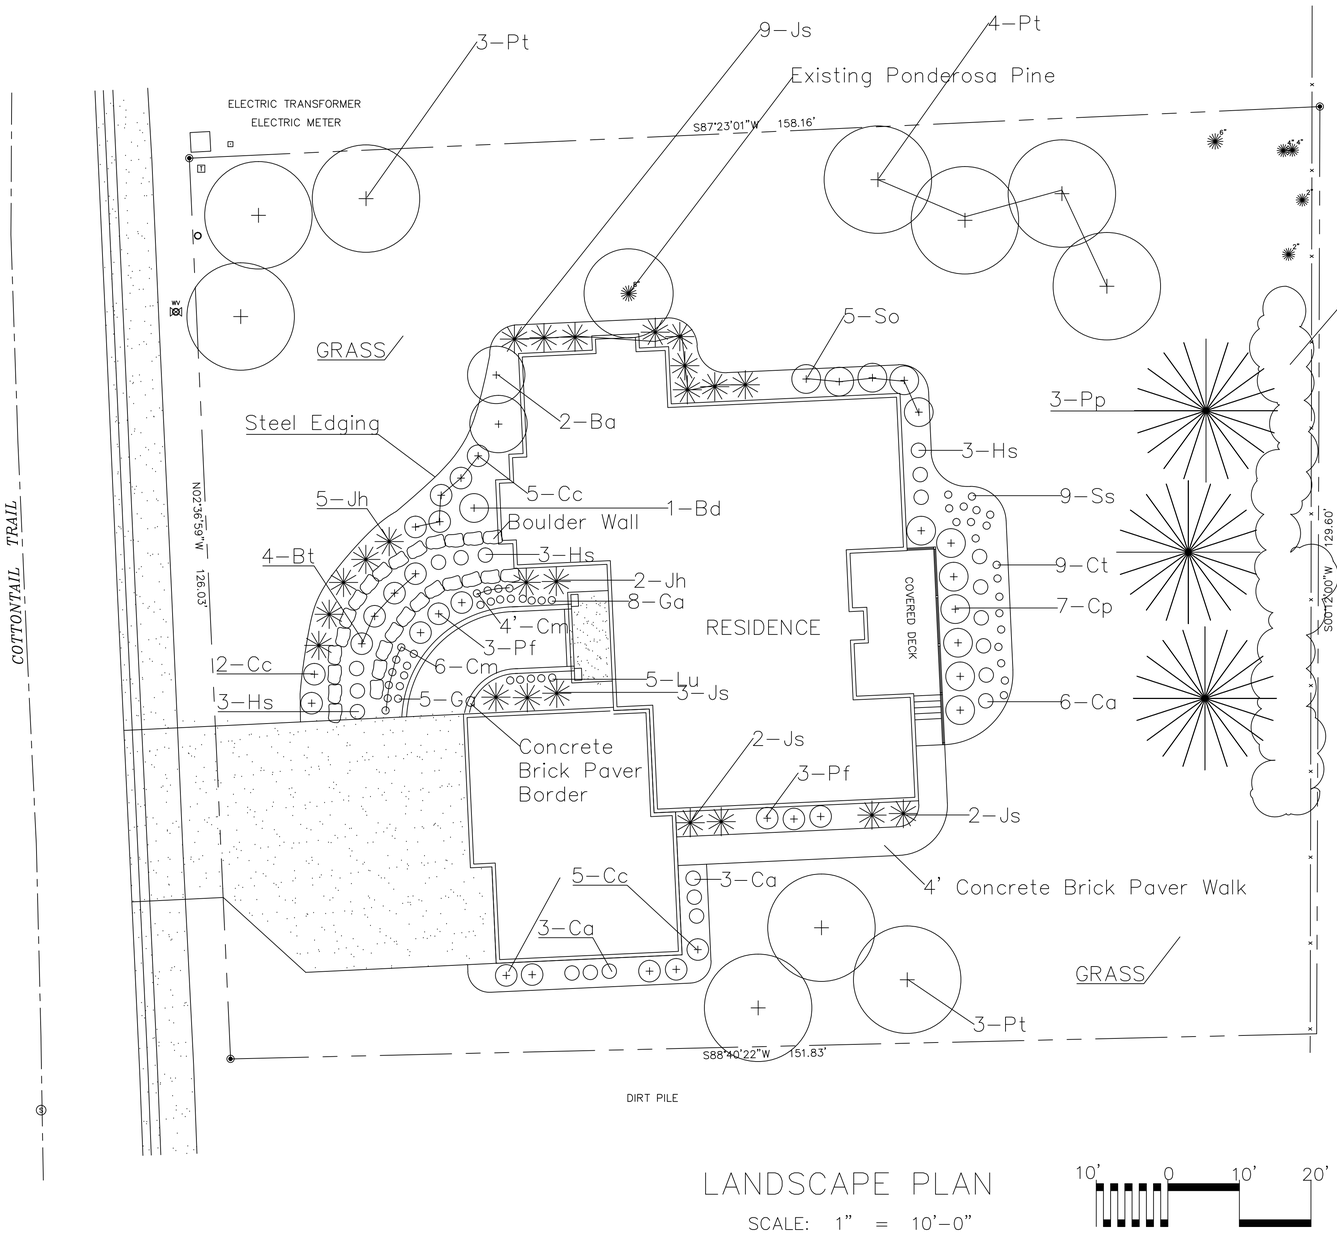

Landscape Schedule

Symbol	Code	Quantity	Botanical Name	Common Name	Size	Notes
TREES						
	Pp	3	Pinus ponderosa	Ponderosa Pine	8' B&B	
	Pt	10	Populus tremuloides	Quaking Aspen	8-10' cont	
SHRUBS						
	Js	12	Juniperus squamata 'Blue Star'	Blue Star Juniper	5 Gal	
	Jh	11	Junip. Horiz. 'Blue Chip'	Blue Chip Juniper	5 Gal	
	Ba	2	Buddleia alternifolia 'Argenta'	Silver Fountain Butterfly Bush	5 Gal	
	Bd	1	Buddleia davidi 'Santana'	Santana Butterfly Bush	5 Gal	
	Cc	12	Caryopteris Clandonensis	Dark Knight Spirea	1 Gal	
	Pf	6	Potentilla fruticosa	Goldfinger Potentilla	1 Gal	
	Cp	7	Cytisus purgan 'Spanish Gold'	Spanish Gold Broom	5 Gal	
	So	5	Symphoricarpus occidentalis	Western Snowberry	5 Gal	
	Bt	4	Berberis thunbergi 'Atropurpurea'	Red Barberry	5 Gal	
GROUND	COVERS	GRASSES	FLOWERS			
	Hs	9	Helictotrichon Sempervirens	Blue Avena Grass	1 gal	
	Ca	12	Calamagrostis Acutifolia 'Karl Foerster'	Feather Reed Grass	1 Gal	
	Ga	13	Gaillardia arista 'Goblin'	Goblin Dwarf Gallardia	1 Gal	
	Ss	9	Salvia sylvestris 'May Night'	May Night Salvia	1 Gal	
	Ct	9	Cerastium tomentosum	Snow-in-Summer	4" pot	
	Cm	10	Chrysanthemum maximum	Shasta Daisy	1 Gal	Cont.

LANDSCAPE NOTES

1. Soil Preparation: Min. 3" plant base compost tilled 6" deep per 1000 sf
2. Fertilizer: Apply balanced fertilizer in all turf grass areas
3. Weed Barrier fabric to be placed in all shrub beds and covered with 3" organic mulch (gorilla hair)
4. All pavers to be Holland style as manuf. by Pavestone. Color to be determined
5. Place fertilizer tablets in each planting pit
6. Locate all utility lines prior to construction (especially near front yard aspen)
7. All planting beds and trees to be drip irrigated.
8. All plant material to be inspected by the landscape architect prior to planting.
9. All trees to be stakes w/2 stakes per tree.

LANDSCAPE PLAN

SCALE: 1" = 10'–0"

10' 0 10' 20'

NORTH

Project Title: 1225 COTTONTAIL TRAIL
LANDSCAPE PLAN

Design by: James Rees, Landscape Architect
520 Silver Spring Cr. Colorado Springs, CO
719-651-3136
jwr520@gmail.com
Date: 9-27-18